

Quick Installation Guide

Mobile Wi-Fi

* Images are for demonstration only.


LED Indicators

| LED | Status | Explanation |
|------------|----------------|---|
| (Power) | Solid Green | Mobile Wi-Fi has enough power or is fully charged. |
| | Solid Red | The battery level is between 10% and 20%. |
| | Blinking Red | The battery level is lower than 10%. |
| | Blinking Green | Mobile Wi-Fi is charging. |
| (Internet) | Off | Power is off. |
| | Solid On/Off | Internet service is available or unavailable. |
| | Blinking | Mobile Wi-Fi has connected to network, but internet service is unavailable. |
| (Wi-Fi) | On/Off | Wi-Fi is enabled or disabled. |


! The LEDs will turn off automatically after idling for 30 seconds. To check the LED status, press the Power button to turn them on again.

1. Install the SIM Card

a. Lift the cover to insert the SIM card into the Nano slot.


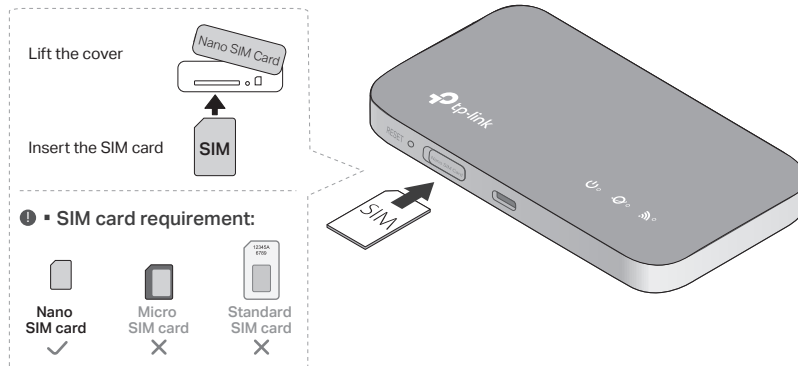


b. Press and hold the Power button to power on the Mobile Wi-Fi.

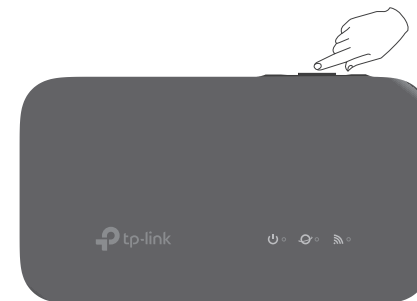

2. Connect to the Internet

Connect your wireless device to the Mobile Wi-Fi using the default SSID and Wireless Password on the info card.

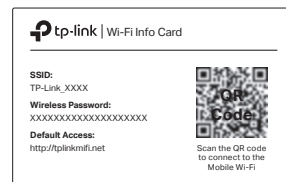

* You can also find the default SSID and Wireless Password on the product label.

😊 Enjoy the internet!



! • If you cannot access the internet, refer to **FAQ > Q1**.

• By default, the Mobile Wi-Fi will turn off Wi-Fi when no wireless devices are connected to it for 10 minutes. To resume the Wi-Fi connection, press the Power button.

Managing Your Mobile Wi-Fi

Manage your Mobile Wi-Fi using any of the methods below. You can customize Wi-Fi settings, block Wi-Fi devices and more.

tpMiFi App


1. Get the **tpMiFi** app from App Store or Google Play, or by scanning the QR code.



2. Connect your wireless device to the Mobile Wi-Fi.
3. Launch the **tpMiFi** app and create a password to log in.

Web Management Page

1. Connect your wireless device to the Mobile Wi-Fi. If it is a computer, make sure it is set to obtain an IP address automatically.
2. Launch a web browser and visit <http://tplinkmifi.net> or <http://192.168.0.1>. Create a password to log in.


 For technical support, user manuals and more information, please visit <https://www.tp-link.com/support>, or simply scan the QR code.



Charging Your Mobile Wi-Fi


Method 1


Via a Wall Outlet (Recommended)



Method 2

Via a Computer



- The Power LED  will be solid green when the Mobile Wi-Fi is fully charged.
- The power adapter is not provided by TP-Link.

FAQ (Frequently Asked Questions)

Q1. What should I do if I cannot access the internet (the Internet LED is blinking or off)?

- A. Log into the web management page (<http://tplinkmifi.net>), and check the following:
 - **Check PIN status**
If the current SIM card status is **PIN Locked**, your SIM card is PIN protected and you need to unlock it using the PIN code provided by your mobile carrier.
 - **Verify the mobile carrier parameters**
Go to **Advanced > Dial-up > Dial-up Settings**, then verify that the parameters (i.e. APN, username and password) provided by your mobile carrier are correct. If they are incorrect, enter the correct information or create a new profile, then save the settings.

- **Check the Data Roaming settings**

If your SIM card is operated in a roaming service area, go to **Advanced > Dial-up > Dial-up Settings**, enable **Data Roaming** and save the settings.

- **Check Mobile Data**

Go to **Advanced > Dial-up > Dial-up Settings** to verify that **Mobile Data** is On. If not, enable it and save the settings.

- **Check Data Limit**

Go to **Advanced > Data Usage Settings** to check whether your data usage has exceeded the Total/Monthly allowance.

Q2. How do I restore the Mobile Wi-Fi to its factory default settings?

- A. With the Mobile Wi-Fi powered on, then use a pin to press and hold the **RESET** button until all LEDs turn on momentarily.
Note: Restoring the device to its factory defaults will clear all your settings.

Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use the device where wireless devices are not allowed.
- This equipment can be powered only by equipments that comply with Power Source Class 2 (PS2) or Limited Power Source (LPS) defined in the standard of IEC 62368-1.

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011/65/EU and (EU)2015/863.
The original EU Declaration of Conformity may be found at <https://www.tp-link.com/en/support/ce>
TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.
The original UK Declaration of Conformity may be found at <https://www.tp-link.com/support/ukca>

CAUTION!

Avoid replacement of a battery with an incorrect type that can defeat a safeguard.

Avoid disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.

Do not leave a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas. Do not leave a battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.