

Datasheet Security Never Shuts Down

Full-Color

Turret Network Camera

MODEL: VIGI C440











■ Smart Detection

Receive notifications and check feeds when someone crosses a boundary, enters an area you've set, or obstructs the camera.



Motion Detection

Get instant notifications when your camera detects motion.




Human Detection

Smarter security alerts focus on human movement instead of flying insects, small animals and leaves.



Line-Crossing

Set a boundary and receive an alert anytime a person crosses it from either or both directions.



Area Intrusion

Set customized activity zones around key areas for more focused monitoring.



Camera Tampering

Receive alerts when someone obstructs the camera.





Smart IR

Keeps objects from being under-rendered when far away or overexposed when close to camera at night.



Wide Dynamic Range

Adjusts for lighting contrast to minimize shadowing effects and renders images true to life.




3D DNR

Removes abnormal pixelation to provide clearer video and eliminate distortion.

// VIGI Surveillance Solution


The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

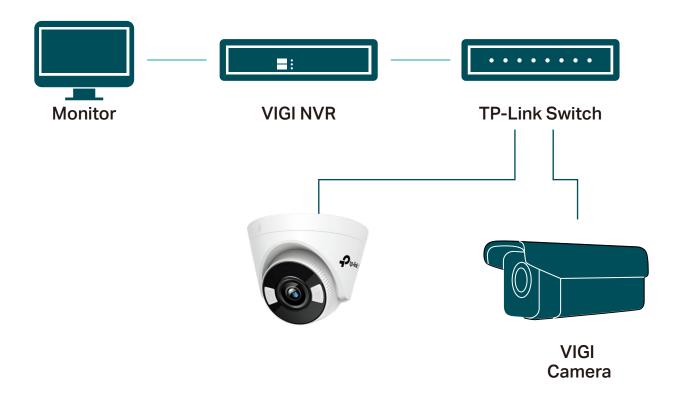

I Flexible Installation

Easily route your camera's cable into a dropped ceiling or avoid drilling by slotting it through the camera's side outlet.

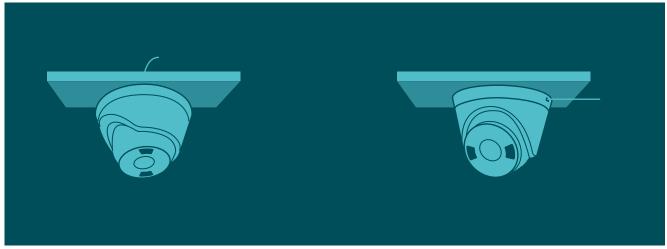

Specifications

Camera		
Image Sensor	1/3" Progressive Scan CMOS	
Day & Night	IR Cut Filter	
Digital Noise Reduction	3D DNR	
WDR	DWDR	
Lens		
Lens Type	Fixed focal lens, 2.8mm, 4mm	
Aperture	4 mm: F1.6 2.8 mm: F1.6	
Focal Length & FOV	4mm Horizontal FOV: 79°Vertical FOV: 43°Diagonal FOV: 93° 2.8mm Horizontal FOV: 102°, vertical FOV: 55°, diagonal FOV: 122°	
Lens Mount	M12	
Illuminator		
IR LED	Range: 30m; Wavelength: 850nm	
White LED	Range: 30m	
Compression Standard		
Video Compression	Main stream: H.265/H.264 Sub-Stream: H.265/H.264	
H.264 Type	Main Profile/High Profile	
H.264+	Main Stream Supported	
H.265 Type	Main Profile	
H.265+	Main Stream Supported	
Video Bit Rate	Main Stream: 256 Kbps to 4 Mbps Sub-Stream: 64 Kbps to 512 Kbps	
Smart Feature-set		
Smart Event	Area Intrusion Detection, Line-Crossing Detection, Human Detection	

Basic Event	Motion Detection, Video Tampering Detection, Exception (Illegal login)
Linkage Method	Trigger Notification: ONVIF, HTTPS
Region of Interest	1 Region
Image	
Max. Resolution	4MP
Main Stream	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 2560x1440, 2304x1296, 2048x1280, 1920x1080
Sub-Stream	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 640x480, 352x288, 320x240
Image Enhancement	BLC/3D DNR/Prevent Overexposure to Infrared Light
Image Settings	Mirror, Brightness, Contrast, Saturation, Sharpness, Exposure, WDR, White Balance Adjustable by Client Software
Day/Night Switch	Day/Night/Auto/Schedule
Day/Night Switch Network	Day/Night/Auto/Schedule
	Day/Night/Auto/Schedule TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS
Network	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS,
Network Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS Two Streams, Mirror, Privacy Masks, Password
Network Protocols General Function	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS Two Streams, Mirror, Privacy Masks, Password Reset via E-mail, HTTP Listening
Network Protocols General Function API	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS Two Streams, Mirror, Privacy Masks, Password Reset via E-mail, HTTP Listening ONVIF Password Protection, HTTPS Encryption, IP
Network Protocols General Function API Security	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS Two Streams, Mirror, Privacy Masks, Password Reset via E-mail, HTTP Listening ONVIF Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication
Network Protocols General Function API Security Simultaneous Live View	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS Two Streams, Mirror, Privacy Masks, Password Reset via E-mail, HTTP Listening ONVIF Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication 3 Main Streams & 3 Sub-Streams
Network Protocols General Function API Security Simultaneous Live View User/Host	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS Two Streams, Mirror, Privacy Masks, Password Reset via E-mail, HTTP Listening ONVIF Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication 3 Main Streams & 3 Sub-Streams Up to 21 Users
Network Protocols General Function API Security Simultaneous Live View User/Host Client	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS Two Streams, Mirror, Privacy Masks, Password Reset via E-mail, HTTP Listening ONVIF Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication 3 Main Streams & 3 Sub-Streams Up to 21 Users
Network Protocols General Function API Security Simultaneous Live View User/Host Client Interface	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS Two Streams, Mirror, Privacy Masks, Password Reset via E-mail, HTTP Listening ONVIF Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication 3 Main Streams & 3 Sub-Streams Up to 21 Users VIGI Security Manager, VIGI app

On-board Storage	Built-In Memory Card Slot, Support MicroSD Card, Up to 256 GB
Built-in Speaker	Yes
Built-in Microphone	Yes
General	
Operating Temperature	-30–60 °C
Power Supply	12V DC ± 5%, 5.5mm Coaxial Power Plug PoE (802.3af/at, class 0)
Power Consumption	12V DC: Max 5.5W PoE: Class 0
Material	Plastic
Product Dimensions	123 × 123 × 84 mm
Certifications	CE, RCM, BSMI, VCCI, RoHS

Specifications are subject to change without notice and can be found at www.tp-link.com. ©2022 TP-Link